

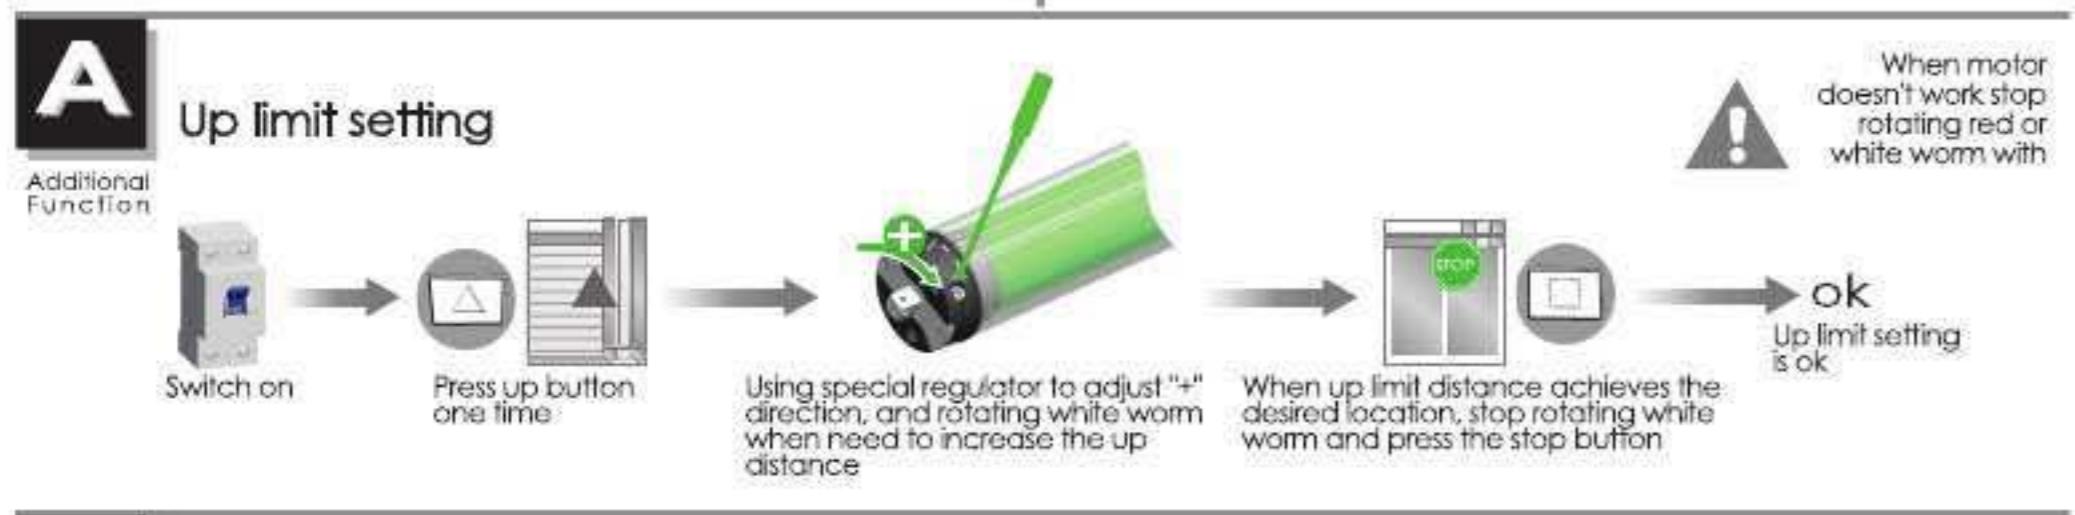
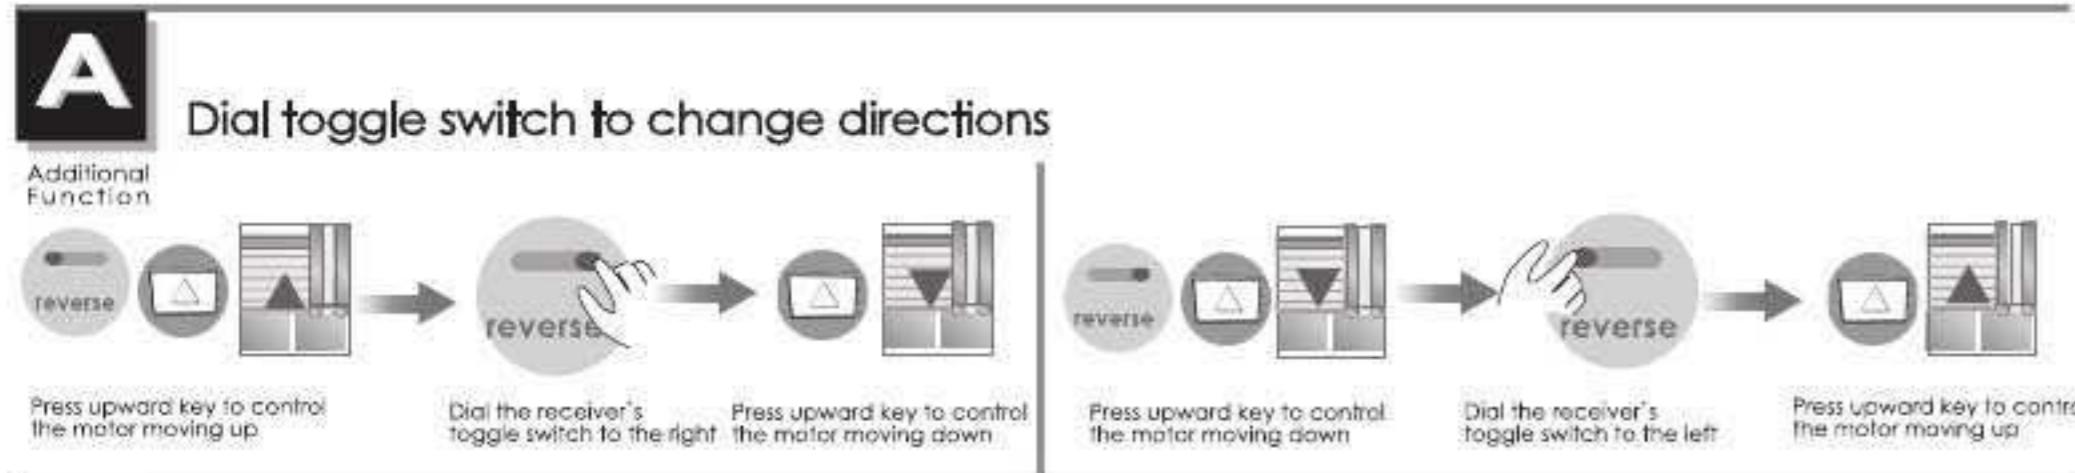


Control System

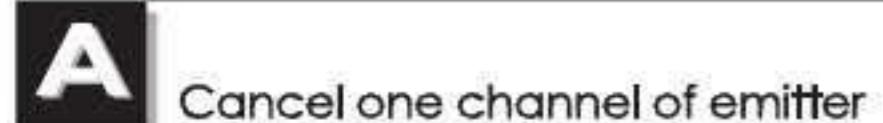

DC155 Control System Specification

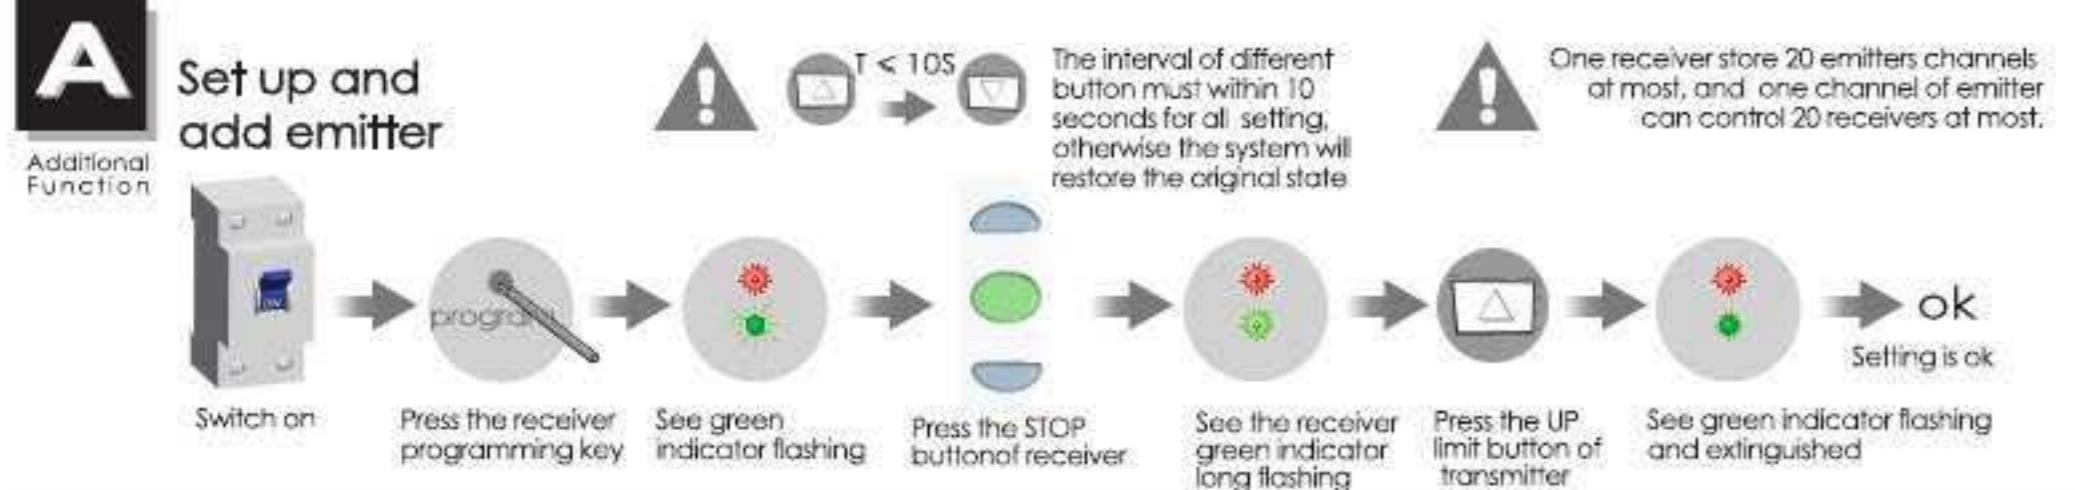

e-markizy.pl
systemy osłonowe

Version No.: A/00

T Receiver specification




Standard Tubular Motor
DC 136 single receiver

group control channel match code, delete code, convert direction at unworkable. When receiver in the mode of dot function, press up key or down key within two seconds, emitter control the motor working in dot function, if continuous press more than 2 seconds, motor will last working.

- ✗ wireless receiver
- ✗ electronic
- ✗ light-touch
- ✗ dot-move
- ✗ dial toggle switch to change directions
- ✗ connect 20 unit emitters at most
- ✗ standard type DC136 can store 20 effective channels, over 20 channels, if still add new channel, only last channel will be repeating

Control Range

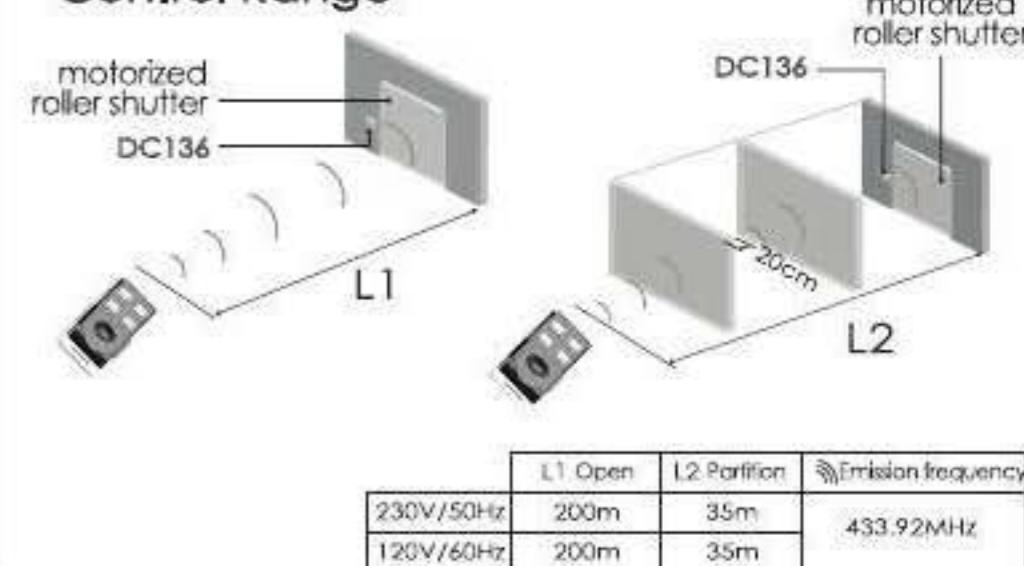

T Matchable emitter


Technical Support



5-channel emitter = single channel emitter × 5
one channel of emitter can control 20 receivers at most

single channel emitter DC90
5-channel emitter DC92
15-channel emitter DC94
miniaturised portable emitter DC14
miniaturised portable emitter DC44
miniaturised portable emitter DC61
miniaturised portable emitter DC115
single channel timer emitter DC112
15-channel timer emitter DC137
15-channel timer emitter DC170
single channel wall-mounted emitter DC111
Portable single wall-mounted emitter DC48
Portable double wall-mounted emitter DC49
Wind-sun sensor DC83

Button specification

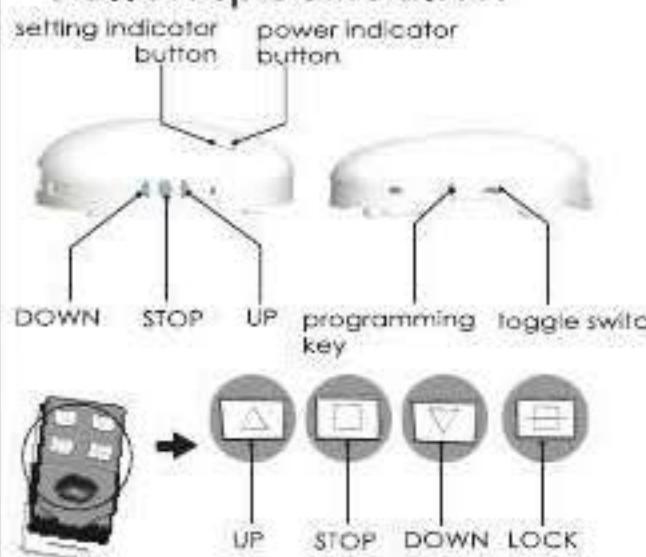

T Circuit installation

Technical Support



The best installation distance

